



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



⑪ Publication number: **0 395 157 B1**

⑫

## EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of patent specification: **17.08.94** ⑥① Int. Cl.<sup>5</sup>: **H01J 1/14**

②① Application number: **90201001.6**

②② Date of filing: **23.04.90**

⑤④ Oxide cathode.

③① Priority: **28.04.89 NL 8901076**

④③ Date of publication of application:  
**31.10.90 Bulletin 90/44**

④⑤ Publication of the grant of the patent:  
**17.08.94 Bulletin 94/33**

⑥④ Designated Contracting States:  
**DE ES FR GB IT NL SE**

⑥⑤ References cited:  
**EP-A- 0 210 805**  
**FR-A- 2 616 586**

⑦③ Proprietor: **N.V. Philips' Gloeilampenfabrieken**  
**Groenewoudseweg 1**  
**NL-5621 BA Eindhoven (NL)**

⑦② Inventor: **Derks, Petrus Jacobus Antonius Ma-**  
**ria**  
**c/o INT. OCTROOIBUREAU B.V.,**  
**Prof. Holstlaan 6**  
**NL-5656 AA Eindhoven (NL)**  
Inventor: **Smets, Carolus Antonius**  
**c/o INT. OCTROOIBUREAU B.V.,**  
**Prof. Holstlaan 6**  
**NL-5656 AA Eindhoven (NL)**

⑦④ Representative: **Raap, Adriaan Yde**  
**INTERNATIONAAL OCTROOIBUREAU B.V.,**  
**Prof. Holstlaan 6**  
**NL-5656 AA Eindhoven (NL)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The invention relates to a cathode having a supporting body substantially comprising nickel and being coated with a layer of electron-emissive material comprising alkaline earth metal oxides and comprising at least barium and at most 5% by weight of yttrium oxide, scandium oxide, or an oxide of a rare earth metal.

Such cathodes are described, for example, in EP-A-0,210,805. The emission of such cathodes is based on the release of barium from barium oxide. In addition to the barium oxide the electron-emissive material usually comprises strontium oxide and sometimes calcium oxide. Improved electron emission properties are obtained by the addition of yttrium oxide or scandium oxide.

The actual emission is mainly ensured by small areas (so-called "sites") having the lowest effective electron work function, which sites are spread over the electron-emissive material. In practice sites having a slightly higher work function will hardly contribute to the electron current generated by the cathode.

For a high effective electron emission it is therefore favourable to choose the number of sites having a minimum possible work function as optimally as possible in the total distribution of sites.

A cathode according to the invention is therefore characterized in that the yttrium oxide or scandium oxide or oxide of the rare earth metal is present in the electron-emissive material as particles the majority of which has a diameter of at most 5  $\mu\text{m}$  and preferably at most 1  $\mu\text{m}$ .

The emissive material preferably comprises 0.0-1%, by weight of yttrium oxide, scandium oxide or oxide of a rare earth metal.

In a preferred embodiment the electron-emissive material comprises 0.1-1% by weight of yttrium oxide or scandium oxide.

In another preferred embodiment the electron-emissive material comprises 0.02-0.5% by weight of europium oxide.

The invention is based on the recognition that the size of the surface of the grains influences the formation of the number of sites. It is found that for a smaller grain size it is sufficient to have smaller quantities of yttrium oxide, scandium oxide or the rare earth oxide in the emissive layer.

The invention will now be described in greater detail with reference to an embodiment and the drawing in which

Fig. 1 is a diagrammatic cross-sectional view of a cathode according to the invention, while

Fig. 2 shows the results of life tests on cathode ray tubes comprising cathodes having different percentages of yttrium oxide in the layer of electron-emissive material for a first value of the

grain diameter of the yttrium oxide powder and Fig. 3 shows similar results for another value of the grain diameter of the yttrium oxide powder.

The cathode 1 in Fig. 1 has a cylindrical nichrome cathode shaft 3 provided with a cap 7 in this embodiment. The cap 7 substantially comprises nickel and may comprise reducing means such as, for example, silicon, magnesium, manganese, aluminium and tungsten. The cathode shaft 3 accommodates a helical filament 4 which comprises a metal helically wound core 5 and an electrically insulating aluminium oxide layer 6.

An approximately 70  $\mu\text{m}$  thick layer of emissive material 2 is present on the cap 7, which layer is provided, for example by means of spraying. The layer 2 comprises, for example a mixture of barium oxide and strontium oxide obtained by providing and subsequently decomposing barium strontium carbonate or a mixture of barium oxide, strontium oxide and calcium oxide.

Moreover, a given quantity of yttrium oxide or scandium oxide has been added to the mixture.

Cathodes having an emissive layer comprising a mixture of barium oxide and strontium oxide to which 0.6% by weight, 1.3% by weight, 2.5% by weight, 5% by weight and 10% by weight, respectively, of yttrium oxide was added, were mounted in a cathode ray tube. The yttrium oxide which was added to the mixture comprised grains half of which had a diameter of 4.5  $\mu\text{m}$  or less ( $d_{50} = 4.5 \mu\text{m}$ ).

After this standard mounting and activation of the cathodes in the tube, the cathode ray tubes were operated for 2000 hours at a filament voltage of 7 V, which is comparable with approximately 10,000 real operating hours. Before and after this life test emission measurements were performed at a filament voltage of 7 V after 30 seconds of conveying current at a cathode load of  $2.2 \text{ A/cm}^2$  (so-called  $\Delta I_{k,30}$  measurement).

The decrease in emission current was 5.1%, 3.5%, 3.9%, 12.8% and 35.7%, respectively, while it was 38% in the case without any additions. The curve of Fig. 2 was drawn through the points thus found and it gives a rough indication of the relationship between the quantity of yttrium oxide (with grain size  $d_{50} = 4.5 \mu\text{m}$ ) and the emission process. Fig. 2 also shows the point  $\alpha$  indicating the variation of the emission (a decrease of 0.7%) under identical conditions for an addition of 0.3% by weight of yttrium oxide having a smaller grain size ( $d_{50} = 0.9 \mu\text{m}$ ).

Fig. 3 shows a similar dependence of the emission process and the added quantity of yttrium oxide which consisted of grains half of which had a diameter of 0.9  $\mu\text{m}$  or less ( $d_{50} = 0.9 \mu\text{m}$ ). After the cathodes with additions of 0.1% by weight, 0.3% by weight, 0.6% by weight and 1.3% by

weight, respectively, to the emissive layer comprising a mixture of barium oxide and strontium oxide had been mounted in the cathode ray tubes and were activated in the conventional manner, they were subjected to an accelerated and heavier life test. The load of the cathode was  $4^A/\text{cm}^2$ , which was also maintained during the emission measurement. The decrease in emission was 3.24%, 0.82%, 1.42% and 3.56%, respectively, after 100 hours, while it was 8.09% in the case without any additions. For a tube with a cathode to which 0.3% by weight of the coarser yttrium powder ( $d_{50} = 4.5 \mu\text{m}$ ) had been added, the decrease of the emission was 6.49% under the same test conditions (point b in Fig. 3).

It is clearly apparent from Figs. 2 and 3 that the same or better results can be obtained when using yttrium oxide with a smaller grain size at smaller quantities of added yttrium oxide.

Also other properties which are characteristic of cathode ray tubes, such as the roll-off point (the point at which the emission current in the cathode ray tube has decreased by 10%, when the filament voltage across the filament is decreased, as compared with the emission current at a filament voltage of 8.5 V) had optimum values at those quantities of yttrium oxide where the curves of Figs. 2 and 3 exhibited a minimum decrease of the emission.

The decrease of the quantity of yttrium oxide to be added (approx. a factor of 5) is approximately proportional to the decrease of the average diameter of the yttrium oxide grains.

A similar relationship was found in tests in which europium oxide ( $\text{Eu}_2\text{O}_3$ ) was added to the emissive layer at diameters ( $d_{50}$ ) of  $2.5 \mu\text{m}$  and  $0.5 \mu\text{m}$ , respectively. Tests similar to those described with reference to Fig. 2 proved that addition of 0.3% by weight of coarse-grained europium oxide ( $d_{50} = 2.5 \mu\text{m}$ ) resulted in an emission decrease of about 8.5% after 100 hours, while addition of about 0.05% by weight of the fine-grained europium oxide ( $d_{50} = 0.5 \mu\text{m}$ ) resulted in a decrease of only 4.3%.

Moreover, since approximately 25 times as many particles of the fine-grained material are used at this lower weight percentage, as compared with the weight percentage required to achieve an optimum result for coarse-grained material, the fine-grained particles are distributed more homogeneously, which leads to a more uniform emission behaviour.

The invention is of course not limited to the embodiments shown, but several variations are possible. For example, when using scandium oxide instead of yttrium oxide, an improved emission at low percentages by weight and smaller grain sizes can be found in a similar manner. Similarly as for

europium oxide, an optimum percentage can be found for oxides of other rare earth metals at smaller grain sizes. The cathode may also be designed in various manners (cylindrical, concave, convex, etc.) and there are various methods of providing the electron-emissive layer.

#### Claims

1. A cathode having a supporting body substantially comprising nickel and being coated with a layer of electron-emissive material comprising alkaline earth metal oxides and comprising at least barium and at most 5% by weight of yttrium oxide, scandium oxide or an oxide of a rare earth metal, characterized in that the yttrium oxide, scandium oxide or oxide of the rare earth metal is present in the electron-emissive material as particles the majority of which has a diameter of at most  $5 \mu\text{m}$ .
2. A cathode as claimed in Claim 1, characterized in that the majority of the particles has a diameter of at most  $1 \mu\text{m}$ .
3. A cathode as claimed in Claim 1 or 2, characterized in that the electron-emissive material comprises 0.02-1% by weight of yttrium oxide, scandium oxide or oxide of a rare earth metal.
4. A cathode as claimed in Claim 3, characterized in that the electron-emissive material comprises 0.1-1% by weight of yttrium oxide or scandium oxide.
5. A cathode as claimed in Claim 1, 2 or 3, characterized in that the electron-emissive material comprises 0.02-0.5% by weight of europium oxide.
6. A cathode as claimed in Claim 1, 2, 3, 4 or 5, characterized in that the electron-emissive material mainly comprises barium oxide and strontium oxide.
7. A cathode as claimed in any one of Claims 1 to 6, characterized in that the supporting body comprises reducing means.
8. An electron beam tube provided with a cathode as claimed in any one of Claims 1 to 7.

#### Patentansprüche

1. Kathode mit einem Trägerkörper, der im wesentlichen aus Nickel besteht und mit einer Schicht aus elektronenemittierendem Material bedeckt ist, das Erdalkalimetalloxide und we-

- nigstens Barium und höchstens 5 Gew. % Yttriumoxid, Scandiumoxid oder einem Seltenerdmetalloxid enthält, dadurch gekennzeichnet, daß das Yttriumoxid, das Scandiumoxid oder das Seltenerdmetalloxid sich im emittierenden Material als Teilchen befindet, von denen der Großteil ein Durchmesser von höchstens 5 µm besitzt.
2. Kathode nach Anspruch 1, dadurch gekennzeichnet, daß der Großteil der Teilchen einen Durchmesser von höchstens 1 µm besitzt.
3. Kathode nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß das elektronenemittierende Material 0,02 bis 1 Gew. % an Yttriumoxid, Scandiumoxid oder Seltenerdmetalloxid enthält.
4. Kathode nach Anspruch 3, dadurch gekennzeichnet, daß das elektronenemittierende Material 0,1 bis 1 Gew. % an Yttriumoxid oder Scandiumoxid enthält.
5. Kathode nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, daß das elektronenemittierende Material 0,02 bis 0,5 Gew. % an Europiumoxid enthält.
6. Kathode nach Anspruch 1, 2, 3, 4 oder 5, dadurch gekennzeichnet, daß das elektronenemittierende Material im wesentlichen Bariumoxid und Strontiumoxid enthält.
7. Kathode nach einem der Ansprüche 1 bis 6, dadurch gekennzeichnet, daß der Trägerkörper Reduktionsmittel enthält.
8. Elektronenstrahlröhre mit einer Kathode nach einem der Ansprüche 1 bis 7.
2. Cathode suivant la revendication 1, caractérisée en ce que les particules ont en majorité un diamètre de 1 µm au maximum.
3. Cathode suivant la revendication 1 ou 2, caractérisée en ce que la matière émissive pour les électrons comprend 0,02 à 1% en poids d'oxyde d'yttrium, d'oxyde de scandium ou d'oxyde d'un métal des terres rares.
4. Cathode suivant la revendication 3, caractérisée en ce que la matière émissive pour les électrons comprend 0,1 à 1% en poids d'oxyde d'yttrium ou d'oxyde de scandium.
5. Cathode suivant la revendication 1, 2 ou 3, caractérisée en ce que la matière émissive pour les électrons comprend 0,02 à 0,5% en poids d'oxyde d'euprium.
6. Cathode suivant la revendication 1, 2, 3, 4 ou 5, caractérisée en ce que la matière émissive pour les électrons comprend principalement de l'oxyde de baryum et de l'oxyde de strontium.
7. Cathode suivant l'une quelconque des revendications 1 à 6, caractérisée en ce que le corps de support comprend des agents réducteurs.
8. Tube à faisceau d'électrons équipé d'une cathode suivant l'une quelconque des revendications 1 à 7.

#### Revendications

1. Cathode comportant un corps de support qui comprend en substance du nickel et qui est revêtu d'une couche d'une matière émissive pour les électrons comprenant des oxydes de métaux alcalino-terreux et comprenant au moins du baryum et au maximum 5% en poids d'oxyde d'yttrium, d'oxyde de scandium ou d'un oxyde d'un métal des terres rares, caractérisée en ce que l'oxyde d'yttrium ou l'oxyde de scandium ou l'oxyde d'un métal des terres rares est présent dans la matière émissive pour les électrons à l'état de particules ayant en majorité un diamètre de 5 µm au maximum.

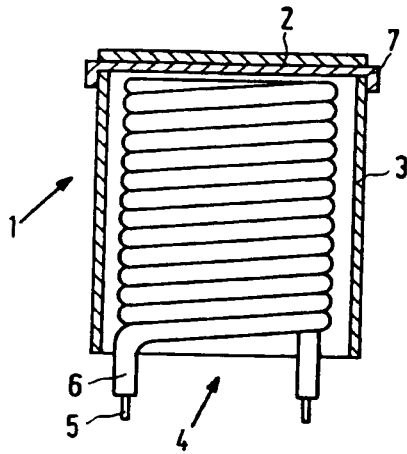


FIG. 1

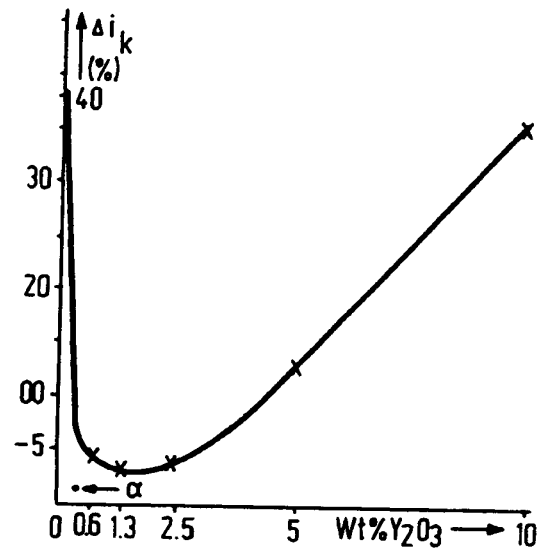


FIG. 2

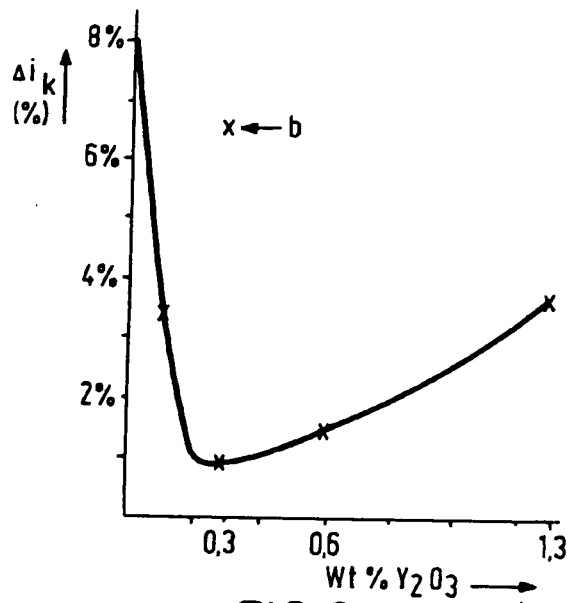


FIG. 3